

General Description

Ultra-FRD module devices are optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems.

These diode modules are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.

Features



- Repetitive Reverse Voltage : $V_{RRM} = 600V$
- Low Forward Voltage : $V_F(\text{typ.}) = 1.45V$
- Average Forward Current : $I_F(\text{Av.}) = 100A$ @ $T_C = 100^\circ C$
- Ultra-Fast Reverse Recovery Time : $t_{rr}(\text{typ.}) = 35ns$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Isolation Type Package

Applications

- High Speed & High Power converters, Welders
- Various Switching and Telecommunication Power Supply



Ordering Information

Product Name	MPKB2CA100U60	MPKB2CB100U60
Optional Information	Center Common & N-type 	Center Common & P-type 

Absolute Maximum Ratings @ $T_C = 25^\circ C$ (Per Leg)

Characteristics	Conditions	Symbol	Rating	Unit
Repetitive Peak Reverse Voltage		V_{RRM}	600	V
Reverse DC Voltage		$V_{R(DC)}$	480	V
Average Forward Current	$T_C = 25^\circ C$ $T_C = 100^\circ C$	$I_{F(AV)}$	200	A
			100	A
Surge(non-repetitive) Forward Current	One Half Cycle at 60Hz, Peak Value	I_{FSM}	1400	A
I^2t for Fusing	Value for One Cycle Current, $t_w = 8.3ms$, $T_J = 25^\circ C$ Start	I^2t	16.2×10^3	A^2s
Junction Temperature		T_J	-40 ~ 150	$^\circ C$
Maximum Power Dissipation		P_D	360	W
Isolation Voltage	@AC 1 minutes	V_{isol}	2500	V
Storage Temperature		T_{stg}	-40 ~ 150	$^\circ C$
Mounting Torque(M6)		-	4.0	N.m
Terminal Torque(M5)	Typical Including Screws	-	2.0	N.m
Weight		-	120	g

Electrical Characteristics @T_c = 25°C(unless otherwise specified)

Characteristics	Conditions		Symbol	Min.	Typ.	Max.	Unit
Cathode Anode Breakdown Voltage	I _R =100uA		V _R	600	-	-	V
Diode Maximum Forward Voltage	I _F =100A	T _C =25 °C	V _{FM}	-	1.45	1.8	V
		T _C =100 °C		-	1.35	-	
Diode Peak ReverseRecovery Current	T _c =100 °C, V _{RRM} applied	T _C =100 °C	I _{RRM}	-	-	1.0	mA
Diode Reverse Recovery Time	I _F =1A, V _R =30V di/dt = -200A/uS	T _C =25 °C	t _{rr}	-	35	50	ns
Diode Reverse Recovery Time	I _F =100A, V _R =300V di/dt = -200A/uS	T _C =25 °C	t _{rr}	-	90	130	ns
		T _C =100 °C		-	160	-	

Thermal Characteristics

Characteristics	Conditions	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance(Isolation Type)	Junction to Case	R _{th(j-c)}	-	-	0.34	°C/W

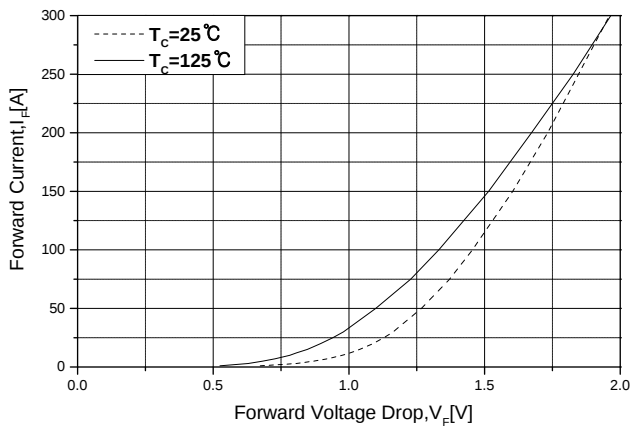


Fig.1 Typical Forward Voltage Drop vs. Instantaneous Forward Current

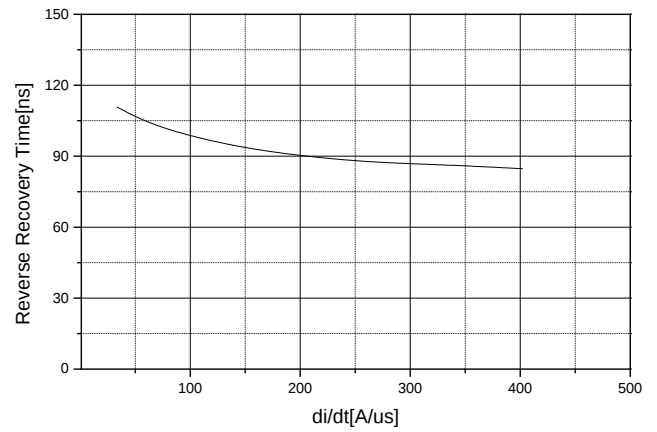


Fig.2 Typical Reverse Recovery Time Vs. $-di/dt$

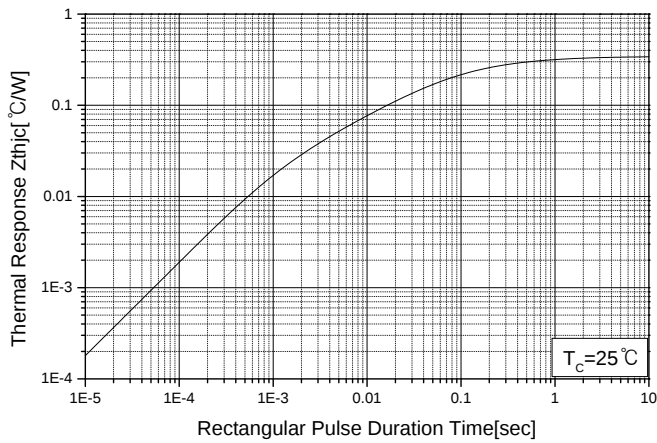


Fig.3 Transient Thermal Impedance (Z_{thjc}) Characteristics


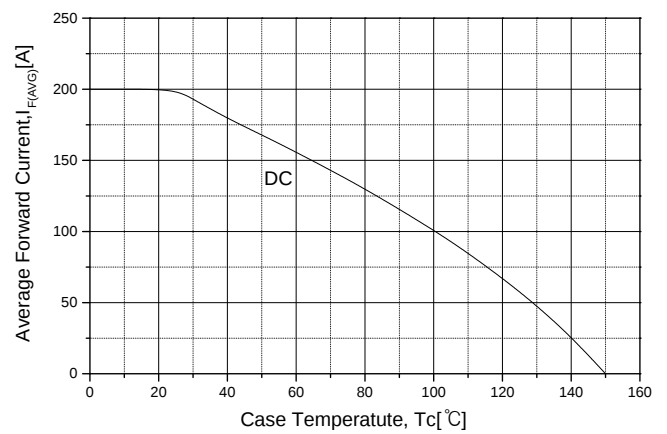


Fig.4 Forward Current Derating Curve

Package Dimension

5DM-1

Dimensions are in millimeters, unless otherwise specified

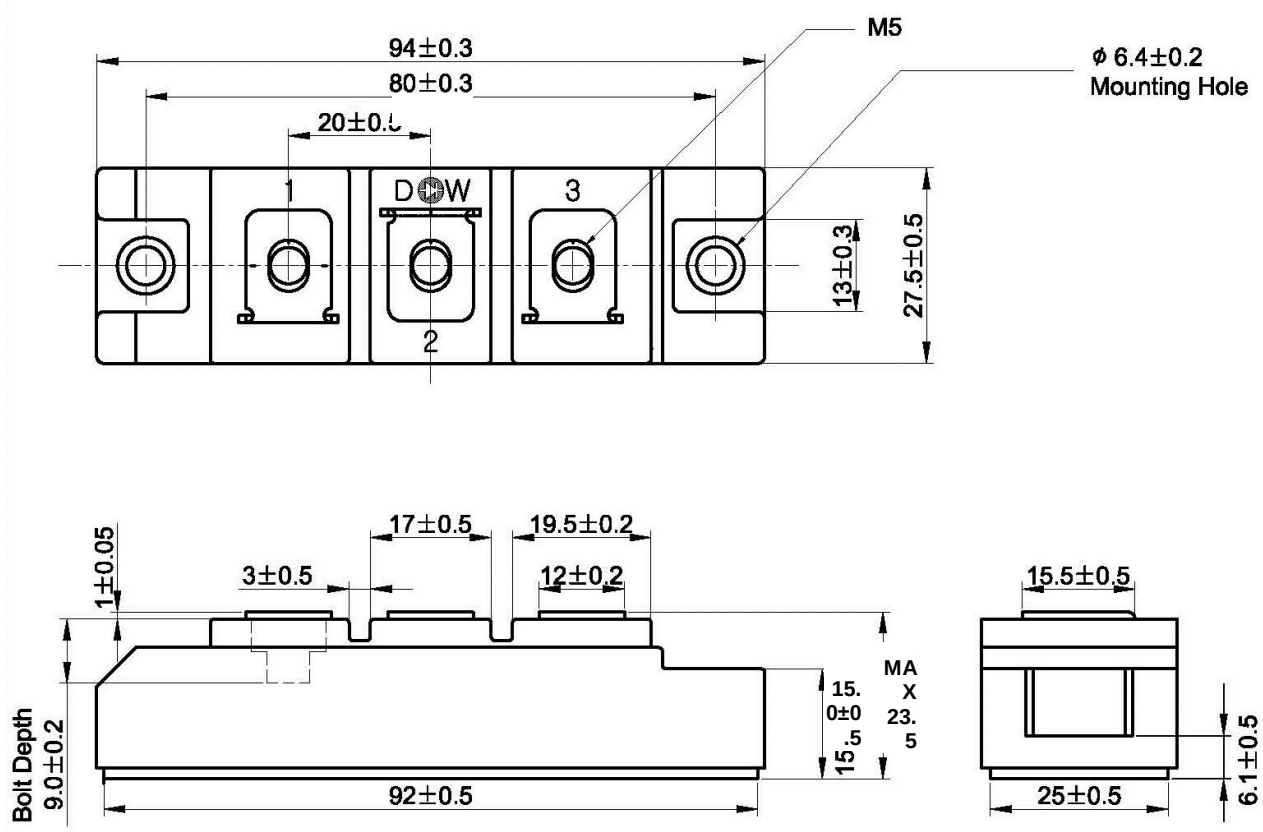

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product. [MagnaChip](#) is a registered trademark of MagnaChip Semiconductor Ltd.